


# Waterproof Switch Panel


## 5 Switch Dual USB

900-5WPUSB

### Installation Instructions

1. Cut hole as per template on reverse. Use 4 screws supplied to retain panel.
2. Connect the positive from the battery master switch into the connector supplied with the panel.
3. Connect negative from battery to negative stud or buss bar (not supplied with panel).
4. Connect positive from appliance to the empty terminal on selected switch and fit corresponding label (supplied in pack).
5. Fit negative from appliance to negative stud.
6. The fuse holders are supplied with 15A blade type fuses.
7. To replace blown fuses, flip back cover of the red inline fuse holder.
8. Push in new fuse and close cover (Note: Maximum fuse rating 20A).

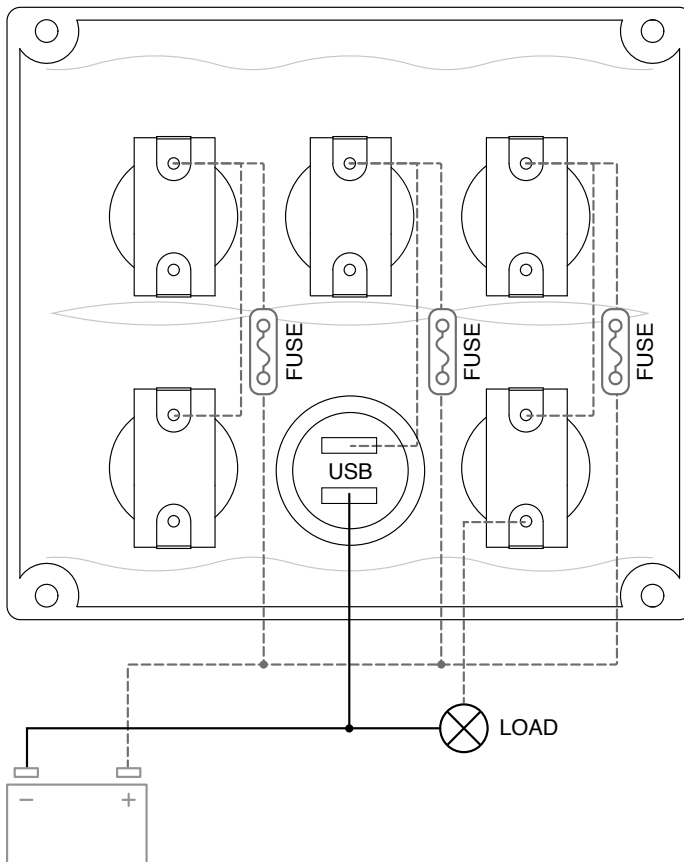

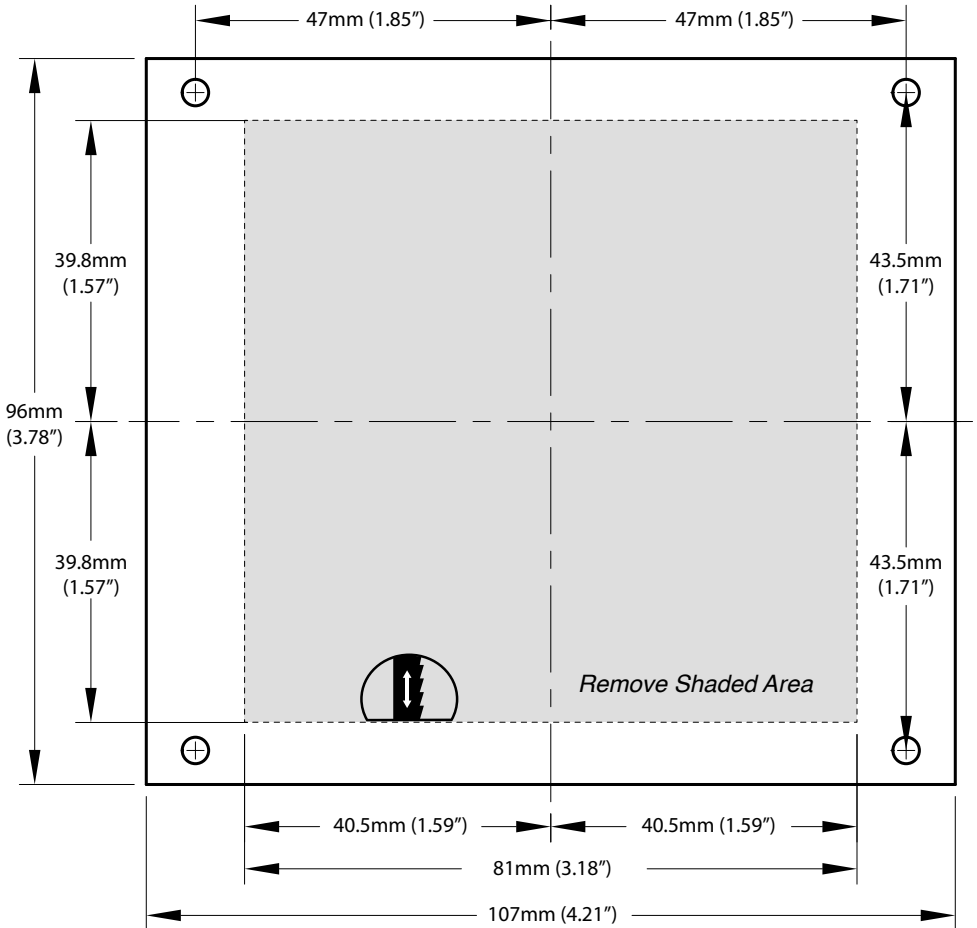

Please check scale before using

